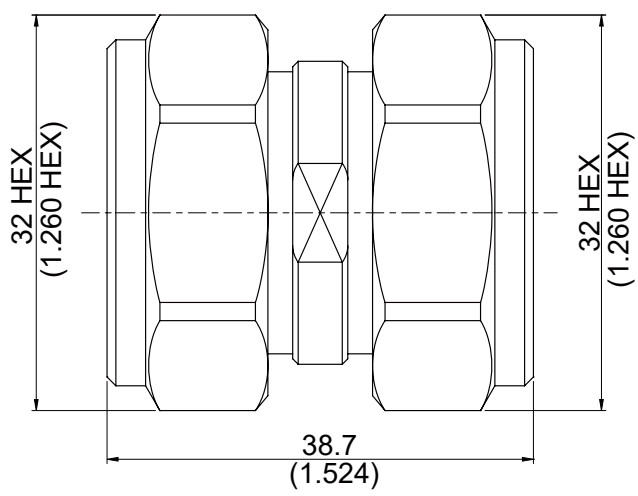


AD-DI3DI3/LP	Low PIM 7/16 plug to 7/16 plug 7.5GHz VSWR 1.15	50Ω																		
																				
Intermodulation ≥165 dBC																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parts</th> <th style="width: 25%;">Material</th> <th style="width: 50%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Retainer Ring</td> <td style="text-align: center;">Brass</td> <td style="text-align: center;">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td style="text-align: center;">Contact Pin</td> <td style="text-align: center;">Brass</td> <td style="text-align: center;">Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td style="text-align: center;">Insulator</td> <td style="text-align: center;">Teflon</td> <td></td> </tr> <tr> <td style="text-align: center;">Body</td> <td style="text-align: center;">Brass</td> <td style="text-align: center;">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td style="text-align: center;">Coupling Nut</td> <td style="text-align: center;">Brass</td> <td style="text-align: center;">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																		
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																		
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Insulator	Teflon																			
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																		
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																		
Weight:																				

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-DI3DI3/LP	Low PIM 7/16 plug to 7/16 plug 7.5GHz VSWR 1.15																
<table border="0"> <tr> <td data-bbox="113 342 531 394">Interface</td> <td></td> </tr> <tr> <td data-bbox="113 394 531 539">Standard</td> <td data-bbox="531 394 1482 539">IEC60169-4</td> </tr> </table>		Interface		Standard	IEC60169-4												
Interface																	
Standard	IEC60169-4																
<table border="0"> <tr> <td data-bbox="113 555 531 607">Electrical Data</td> <td></td> </tr> <tr> <td data-bbox="113 607 531 658">Impedance</td> <td data-bbox="531 607 1482 658">50Ω</td> </tr> <tr> <td data-bbox="113 658 531 710">Frequency Range</td> <td data-bbox="531 658 1482 710">DC to 7.5GHz</td> </tr> <tr> <td data-bbox="113 710 531 761">VSWR</td> <td data-bbox="531 710 1482 761">≤ 1.15 (DC To 7.5GHz)</td> </tr> <tr> <td data-bbox="113 761 531 813">Insertion Loss</td> <td data-bbox="531 761 1482 813">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="113 813 531 864">Insulation Resistance</td> <td data-bbox="531 813 1482 864">≥ 10000MΩ</td> </tr> <tr> <td data-bbox="113 864 531 916">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 864 1482 916">4000 V rms</td> </tr> <tr> <td data-bbox="113 916 531 967">Working Voltage (at sea level)</td> <td data-bbox="531 916 1482 967">2700 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 7.5GHz	VSWR	≤ 1.15 (DC To 7.5GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 10000MΩ	Dielectric Withstanding Voltage (at sea level)	4000 V rms	Working Voltage (at sea level)	2700 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC to 7.5GHz																
VSWR	≤ 1.15 (DC To 7.5GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 10000MΩ																
Dielectric Withstanding Voltage (at sea level)	4000 V rms																
Working Voltage (at sea level)	2700 V rms																
<table border="0"> <tr> <td data-bbox="113 1052 531 1104">Mechanical Data</td> <td></td> </tr> <tr> <td data-bbox="113 1104 531 1155">Recommended Coupling Nut Torque</td> <td data-bbox="531 1104 1482 1155">260 in-lbs</td> </tr> <tr> <td data-bbox="113 1155 531 1207">Coupling Proof Torque</td> <td data-bbox="531 1155 1482 1207">310 in-lbs</td> </tr> <tr> <td data-bbox="113 1207 531 1258">Coupling Nut Retention Force</td> <td data-bbox="531 1207 1482 1258">≥ 221 lbs</td> </tr> <tr> <td data-bbox="113 1258 531 1310">Contact Captivation-axial</td> <td data-bbox="531 1258 1482 1310">≥ 45 lbs</td> </tr> <tr> <td data-bbox="113 1310 531 1361">Durability (mating)</td> <td data-bbox="531 1310 1482 1361">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	260 in-lbs	Coupling Proof Torque	310 in-lbs	Coupling Nut Retention Force	≥ 221 lbs	Contact Captivation-axial	≥ 45 lbs	Durability (mating)	≥ 500				
Mechanical Data																	
Recommended Coupling Nut Torque	260 in-lbs																
Coupling Proof Torque	310 in-lbs																
Coupling Nut Retention Force	≥ 221 lbs																
Contact Captivation-axial	≥ 45 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td data-bbox="113 1451 531 1503">Environmental Data</td> <td></td> </tr> <tr> <td data-bbox="113 1503 531 1554">Temperature Range</td> <td data-bbox="531 1503 1482 1554">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1554 531 1606">Thermal Shock</td> <td data-bbox="531 1554 1482 1606">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1606 531 1657">Moisture Resistance</td> <td data-bbox="531 1606 1482 1657">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1657 531 1709">Corrosion</td> <td data-bbox="531 1657 1482 1709">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1709 531 1760">RoHS</td> <td data-bbox="531 1709 1482 1760">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-DI3ID3/LP

SoftPlot Measurement Presentation
VSWR S22

